



Complete Curb Products & Dynasonics Inc.
7229 Fairview St. Houston TX. 77041
P. 713-690-1622 F:713-690-1945


CCP-CAR Curb Adapter Reducer

Standard Features:

- 18ga. G90 min. construction.
- 3"-5" min. height (10" min. with damper tray).
- Continuous welded seams coated with corrosion inhibiting compound.
- 2" deep capping lip.
- Neoprene Gasket material provide for mounting surface seal.

Optional Features:

1. Damper Tray.
2. Heavy gauge galvanized steel.
3. .080 Aluminum construction.
4. 18ga. Stainless Steel, 304-2B construction.
5. Insulation.
6. Extended capping depth.

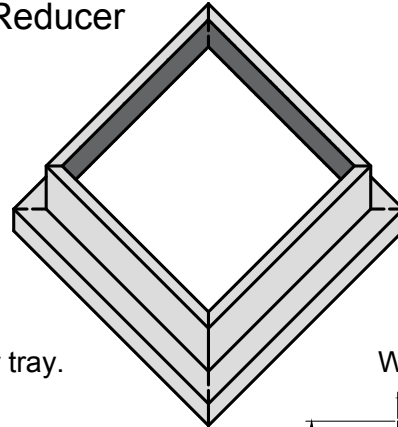

No Damper tray.


With Damper tray.

The top of the Reducer must be at least 1/2" smaller than the new equipment base capping size.



The base of the Reducer must be 3/4" greater than the measured curb size on site after roofing material OR the same size as the previous equipment capping size.

The ordering party is responsible for providing the required damper tray/shelf size, NOT the damper size. Tray sizes vary by manufacture & is usually smaller than the damper size.



The minimum heights displayed are base upon must new fan base capping depth being 2"-3". For reducers/enlargers with damper trays, the operating height can vary from 6"-10" in height. The ordering party must review the damper operating height & be sure to order the reducer greater in height than the damper operating height.

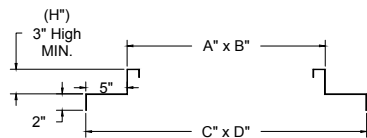


If Difference is 10" or less.

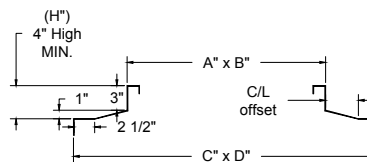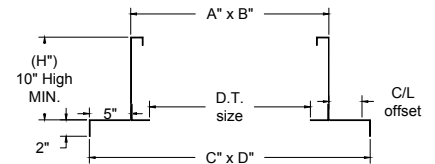

If Difference is greater than 10", but less than double the top size.

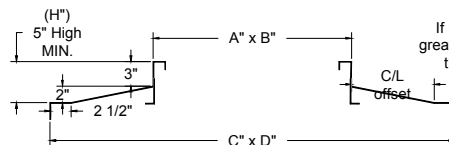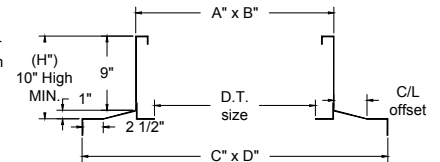

If Difference is greater than double the top size.

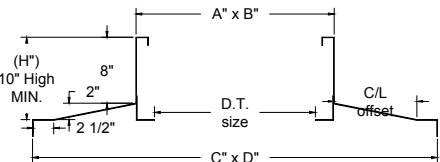

Specification & Dimensions

Quantity	A"	B"	C"	D"	Y" Damper tray	Z" Damper tray	H"	Tag#	Options