



Complete Curb Products & Dynasonics Inc.
7229 Fairview St. Houston TX. 77041
P. 713-690-1622 F:713-690-1945

CCP-DPRC Double Pitched Roof Curb


Standard Features:

- 18ga. G90 min. construction.
- 8" min. height (12" min. with damper tray).
- 2" x 2" Nominal wood nailer.
- 1 1/2" rigid board (R6) insulation.
- Continuous welded seams coated with corrosion inhibiting compound.
- 3 1/2" base mounting flanges all 4 sides.
- Sloped for peak mount application.


Note: Curb I.D. is approx. 3.5" less than the O.D.

Optional Features:

1. Damper Tray.
2. Heavy gauge galvanized steel.
3. .080 Aluminum construction.
4. 18ga. Stainless Steel, 304-2B construction.
5. Gasket material.
6. Interior metal liner (same type as exterior).
7. Pressure Treated wood nailer.
8. Extended base flanges (specify size).

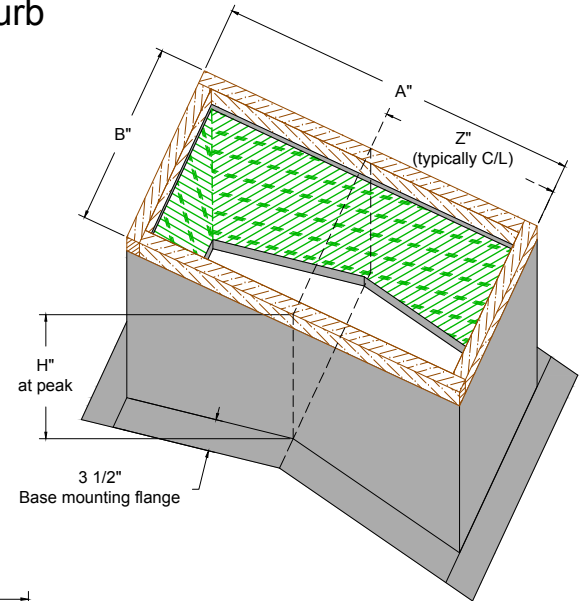

CCP-DPRC Double Pitched Roof Curb (Peak mounted)

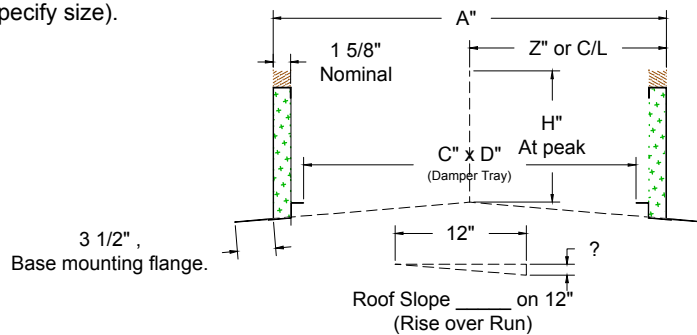

Specification & Dimensions

Quantity	A"	B"	C"	D"	Z"	H"	Roof Slope/Pitch	Tag#	Options