



Complete Curb Products & Dynasonics Inc.
7229 Fairview St. Houston TX. 77041
P. 713-690-1622 F:713-690-1945

CCP-RCEQS Raise Canted Equipment Support



Standard Features:

- 18ga. G90 min. welded construction.
- 20ga. G90 min. cap, 1 1/2" greater LxW.
- 8" min. height.
- 2" x Width, Pine wood nailer.
- Continuous welded seams coated with corrosion inhibiting compound.
- Vertical rise at base, the depth of roof insulation, specified by ordering party. (min. 3/4")
- Integrated 3", 45° Cant.
- 1" base mounting flange.
- Base plate tack welded on.
- Vertical stiffeners tack welded in within 24" on center.

* Available widths are 3.5", 5.5", 7.5", 9.25" or 11.25".

Optional Features:

1. Heavy gauge galvanized steel.
2. .080 Aluminum construction.
3. 18ga. Stainless Steel, 304-2B construction.
4. Extended base flanges.
5. Pressure Treated wood nailer.
6. Stainless steel cap.

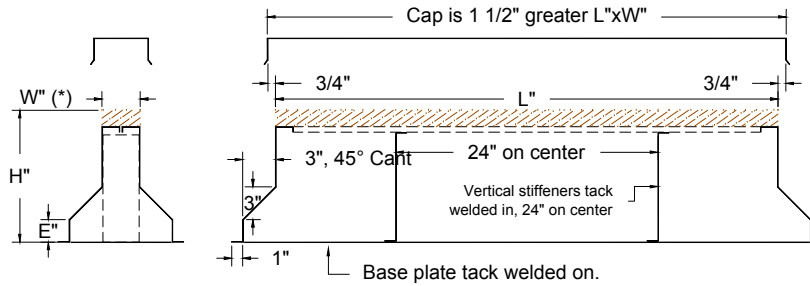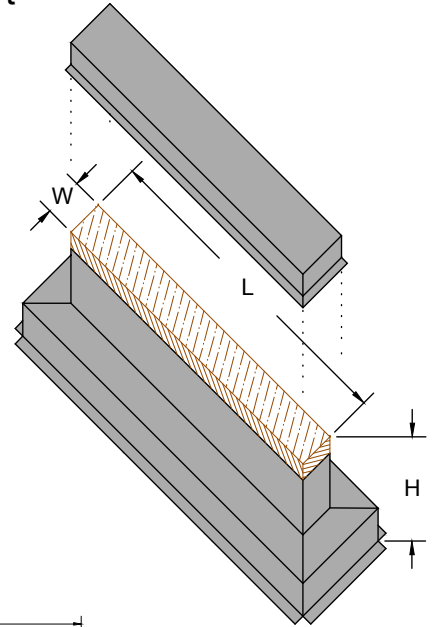

Specification & Dimensions

Quantity	L"	W" (3.5", 5.5", 7.5", 9.25", 11.25")	E" (roof insulation depth)	H"	Tag#	Options