

Complete Curb Products & Dynasonics Inc. 7229 Fairview St. Houston TX. 77041

P. 713-690-1622 F:713-690-1945

Rooftop Curb Adapter


Standard Features:

- 18ga. G90 min. construction.
- Fully mitered & continuous seam welded exterior with exception to blank-off panels when required.
- All welds prepared coated with corrosion inhibiting compound.
- Internal dividers/supports tack welded in.
- Complete interior insulated with 2" 1.5lb. (R8) acoustical insulation.
- All insulation is glued & mechanically pin spotted.
- Insulated top condenser panel screwed on when required.
- 1/4" x 1 1/2" neoprene gasket material supplied loose for field installation onto existing curb surface & the new adapter top surface.

Submittal drawing provided for all adapter combinations & signed approval required prior to ordering. The ordering party is to field verify the existing curb & clearances for the new adaper/unit replacement.

Optional Features:

- Heavy Gauge Galvanized steel construction.
- Aluminum construction, (.080 min.).
- Stainless steel construction (18ga. 304-2B min.).
- Mutli-Zoned application (zone diagram required for existing duct/zones).
- Multi-Unit application.
- Extra gasket material, 25' rolls, indicate quantity.
- 8" long, 12ga. G90 (33ksi) Non-Rated unit Hold-down brackets welded on.

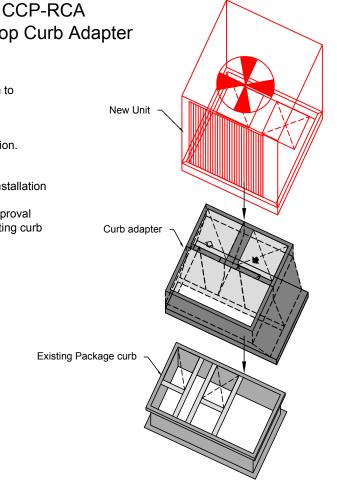

Specification & Dimensions				
Quantity	Existing Unit Model #	New Unit Model #	Tag#	Options