

Complete Curb Products & Dynasonics Inc. 7229 Fairview St. Houston TX. 77041

P. 713-690-1622 F:713-690-1945

CCP-SFPRC Self-Flashing Pitched Roof Curb


Standard Features:

- 18ga. G90 min. construction.
- 8" min. height (12" min. with damper tray).
- 2" x 2" Nominal wood nailer.
- 1 1/2" rigid board (R6) insulation.
- Continuous welded seams coated with corrosion inhibiting compound.
- 3 1/2" base mounting flanges all 4 sides.
- Sloped for pitched roof application.

Note: Curb I.D. is approx. 3.5" less than the O.D.

Optional Features:

- Damper Trav.
- Heavy gauge galvanized steel.
- .080 Aluminum construction.
- 18ga. Stainless Steel, 304-2B construction.
- 5. Gasket material.
- Interior metal liner (same type as exterior).
- Pressure Treated wood nailer. 7.
- Extended base flange at peak (specify size).
- Extended base flanges all sides (specify size).

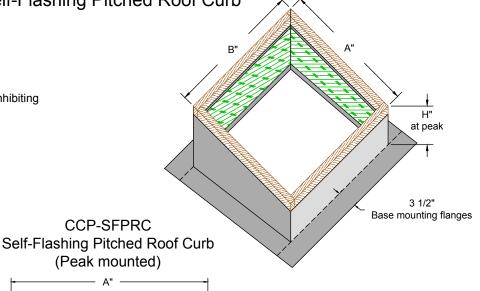



Specification & Dimensions								
Quantity	Α"	В"	C"	D"	H"	Roof Slope/Pitch	Tag#	Options